

United States Department of the Interior  
National Park Service

# National Register of Historic Places Inventory—Nomination Form

For NPS use only  
received **OCT 28 1983**  
date entered

See instructions in *How to Complete National Register Forms*  
Type all entries—complete applicable sections

## 1. Name

historic Bend Amateur Athletic Club Gymnasium  
and/or common Old Bend High School Gym

## 2. Location

street & number NE Corner, Wall and Idaho Streets N/A not for publication  
city, town Bend N/A vicinity of Second Congressional District  
state Oregon code 41 county Deschutes code 017

## 3. Classification

<b>Category</b>	<b>Ownership</b>	<b>Status</b>	<b>Present Use</b>
<input type="checkbox"/> district	<input checked="" type="checkbox"/> public	<input checked="" type="checkbox"/> occupied	<input type="checkbox"/> agriculture
<input checked="" type="checkbox"/> building(s)	<input type="checkbox"/> private	<input type="checkbox"/> unoccupied	<input type="checkbox"/> commercial
<input type="checkbox"/> structure	<input type="checkbox"/> both	<input type="checkbox"/> work in progress	<input checked="" type="checkbox"/> educational
<input type="checkbox"/> site	<b>Public Acquisition</b>	<b>Accessible</b>	<input type="checkbox"/> entertainment
<input type="checkbox"/> object	<u>N/A</u> in process	<input checked="" type="checkbox"/> yes: restricted	<input type="checkbox"/> government
	<u>N/A</u> being considered	<input type="checkbox"/> yes: unrestricted	<input type="checkbox"/> industrial
		<input type="checkbox"/> no	<input type="checkbox"/> military
			<input type="checkbox"/> museum
			<input type="checkbox"/> park
			<input type="checkbox"/> private residence
			<input type="checkbox"/> religious
			<input type="checkbox"/> scientific
			<input type="checkbox"/> transportation
			<input type="checkbox"/> other:

## 4. Owner of Property

name Bend School District No. 1  
street & number 520 NW Wall Street  
city, town Bend N/A vicinity of state Oregon 97701

## 5. Location of Legal Description

courthouse, registry of deeds, etc. Deschutes County Courthouse  
street & number 1164 Bond Street  
city, town Bend state Oregon 97701

## 6. Representation in Existing Surveys

title Statewide Inventory of Historic Properties has this property been determined eligible?  yes  no  
date 1983  federal  state  county  local  
depository for survey records State Historic Preservation Office  
city, town Salem state Oregon 97310

## 7. Description

<b>Condition</b>		<b>Check one</b>	<b>Check one</b>
<input type="checkbox"/> excellent	<input type="checkbox"/> deteriorated	<input type="checkbox"/> unaltered	<input checked="" type="checkbox"/> original site
<input checked="" type="checkbox"/> good	<input type="checkbox"/> ruins	<input checked="" type="checkbox"/> altered	<input type="checkbox"/> moved date <u>N/A</u>
<input type="checkbox"/> fair	<input type="checkbox"/> unexposed		

### Describe the present and original (if known) physical appearance

The Bend Amateur Athletic Club Gymnasium occupies the southwesterly 100 feet of Block 23 of the Park Addition to Bend, the county seat of Deschutes County, Oregon. Completed and opened for use in March, 1918, the three-story building is rectangular in plan, measuring in its main volume 70 x 114 feet. Wall construction is of brick masonry on tuff foundation with concrete mortar. The building is oriented southeasterly to north-easterly, its main entrance fronting Wall Street. It is part of a concentration of civic, or educational buildings arrayed along Wall Street which includes the Reid School of 1914, on the south, old Bend High School (1925) to the north, and the Deschutes County Library across Wall Street to the west. Reid School, constructed of tuff, is presently occupied by the Deschutes County Historical Society. The old Bend High School building is now headquarters of the Bend School District.

The building was designed by Portland architect Lee A. Thomas, who was at the time practicing independently. In its curvilinear gables and English bond brickwork accented by bandings of patterned brick, the gymnasium is Jacobean in style. However, its Indian athlete plaques and austere facade with inset, polygonal central entrance bay are touches of Arts and Crafts architecture influenced by the European New Art movement; examples of which are rare in Oregon. In addition to its stylistic distinction, the building is interesting because of its unusual roof framing system composed of clear-span, bowstring-type timber trusses with steel tension bar reinforcement. The lower chords of the trusses are arched.

The gymnasium rests on a high basement which originally contained a 20 x 60 foot swimming tank, now filled in; a shower and locker room, billiards room, bowling alley and caretaker's quarters. The main story contains the gymnasium-auditorium with its proscenium stage at the east end and two suspended balconies on either side. The partial second story at the west, or entrance end historically contained a lounge-library with chimney pieces of tuff, or native volcanic rock, and the third story, an attic, contained the wrestling room. Interior finish work is straightforward except for the clubroom chimney pieces, just mentioned, and the flat proscenium arch which is trimmed with Indian head bas relief plaques and masques pendant from escutcheons bearing the initials of the Bend Amateur Athletic Club.

The main floor, or gymnasium-auditorium, has a fully-equipped stage and hardwood playing floor. The basic color scheme of the main floor was black and red, initially. The interior has since been repainted. The two suspended balconies provided seating for 350 people each, for a total seating capacity of 1200. On either side of main entrance were offices, ticket booths, with a ladies' restroom in one. On second floor, in the main clubroom with the lava rock fireplaces at each end, there were wood corner window seats. The east end of the clubroom opened toward the main gym and had a balcony for motion picture projection and theatrical flood lights. On either side of the stage, at the opposite end of the building, were reading rooms for mill employees reached from the suspended balconies. On the third floor front, reached by a small spiral staircase, was a wrestling room, heavily padded. In the basement, as has been mentioned, were accommodations for caretaker, a bowling alley, a billiards room, a towel room, showers, 600 lockers, a swimming pool 20 x 60 feet (8' deep to 3'), and seats for 100 spectators.

The roof of the gymnasium, now covered with composition shingles, is a gable roof with its ridge following the direction of the main axis. At either end of the main volume are bold, curved triangular gables with plain coping of cast stone or terra cotta. Lateral gable roof sections run at right angles to the longitudinal gable ridge at east and west ends. Parapet gables of the side elevations are curvilinear in the Jacobean style.

**United States Department of the Interior  
Heritage Conservation and Recreation Service**

**National Register of Historic Places  
Inventory—Nomination Form**

For NCRS use only

received

date entered

Continuation sheet

Item number

7

Page 2

At the base of the valleys of the intersecting gables are rain spouts of cast stone or terra cotta and ornamental bas relief panels trimmed with a cornice and oak leaf motifs. The major panels contain the crouching figures of Native American athletes at the commencement of a foot race.

The principal, or west facade has a tripartite organization in which a central, two-story, polygonal entrance bay is inset from the main wall plane underneath a concrete bond beam. Main story and second story windows in the outer bays are stacked in elongated inset panels. Typical windows of this facade are multi-paned casement windows. The entrance is approached by a grand staircase composed of stairs at either end turning in dog-leg fashion to a double ramp paralleling the facade. A round-arched portal centered in the base of the staircase gives access to the basement level. Above the random-range tuff foundation, which provides contrast to the brick masonry, is a high base course of patterned brick, the top of which is articulated by several courses of vertically-laid stretcher bricks. The main body of the building is finished in English bond, without embellishment at the corners. The third story, or attic is ventilated by frameless slit windows in the gable ends. Side elevations are generally plain, with fenestration essentially limited to a range of small multi-paned windows at the basement level and industrial-type clerestory windows at the top of the wall, lighting the gymnasium.

At the east end of the building is a straightforward, two-story heating plant wing measuring approximately 48 x 100 feet which was telescoped from the rear wall as a WPA project in 1938-1939. This addition is essentially unarticulated but continues the exterior finish treatment of brick (in this case brick salvaged from the old Central School). A tall, square stack venting the heating plant is located at the juncture of the two volumes. Through a tunnel system, this heating plant was developed to serve not only old Bend High School, which occupies the northerly portion of Block 23 and part of an adjacent block, but the nearby Reid and Thompson Elementary Schools as well.

In 1952 the gymnasium was renovated by the School District, with the result that the basement bowling alley and caretaker's quarters were eliminated. The swimming tank was filled in, presumably at an earlier date. Some internal bracing has been added to the main floor. In all other respects the gymnasium, its distinguishing features and stylistic characteristics, are intact and fully evident. Stairways, wiring, plumbing are in need of upgrading, and the roof requires repair. The building is otherwise sound and a likely candidate for adaptive use rehabilitation.

## 8. Significance

Period	Areas of Significance—Check and justify below			
<input type="checkbox"/> prehistoric	<input type="checkbox"/> archeology-prehistoric	<input checked="" type="checkbox"/> community planning	<input type="checkbox"/> landscape architecture	<input type="checkbox"/> religion
<input type="checkbox"/> 1400-1499	<input type="checkbox"/> archeology-historic	<input type="checkbox"/> conservation	<input type="checkbox"/> law	<input type="checkbox"/> science
<input type="checkbox"/> 1500-1599	<input type="checkbox"/> agriculture	<input type="checkbox"/> economics	<input type="checkbox"/> literature	<input type="checkbox"/> sculpture
<input type="checkbox"/> 1600-1699	<input checked="" type="checkbox"/> architecture	<input checked="" type="checkbox"/> education	<input type="checkbox"/> military	<input checked="" type="checkbox"/> social/
<input type="checkbox"/> 1700-1799	<input type="checkbox"/> art	<input type="checkbox"/> engineering	<input type="checkbox"/> music	<input type="checkbox"/> humanitarian
<input type="checkbox"/> 1800-1899	<input type="checkbox"/> commerce	<input type="checkbox"/> exploration/settlement	<input type="checkbox"/> philosophy	<input checked="" type="checkbox"/> theater
<input checked="" type="checkbox"/> 1900-	<input type="checkbox"/> communications	<input type="checkbox"/> industry	<input type="checkbox"/> politics/government	<input type="checkbox"/> transportation
		<input type="checkbox"/> invention		<input type="checkbox"/> other (specify)

**Specific dates** 1917-1918 **Builder/Architect** Lee A. Thomas, Architect

### Statement of Significance (in one paragraph)

The Bend Amateur Athletic Club Gymnasium in the Deschutes county seat of Bend, Oregon, is a three-story building of locally-manufactured brick on a foundation of native tuff with concrete mortar. As completed and opened for use in 1918, it measured 70 x 114 feet. Its curvilinear gables and English bond brickwork are distinctive characteristics of the Jacobean style, while its Indian athlete plaques and austere facade with inset, polygonal central entrance bay are touches of Arts and Crafts architecture. The building was designed by Lee A. Thomas, best known as a member of the Portland-based firm of Thomas and Mercier, responsible for the Oriental Theatre in Portland (1927) and the Memorial Union at Oregon State University in Corvallis (1928). Lee Thomas subsequently designed the old Bend High School (1925) which stands to the north of the gymnasium. Planned and carried out by the Bend Amateur Athletic Club to serve multifarious community purposes, the gymnasium contained a basement swimming tank and bowling alley, a main floor gymnasium and auditorium space with suspended balconies, and on a partial second story was the lounge-library which served the dual purpose of clubroom and reading room. The attic story was used as a wrestling room. The building was acquired by the Bend School District in 1923, after which time it served as a school gymnasium. In 1938 and 1939, under auspices of the WPA, the gymnasium was enlarged by a 48 x 100-foot, compatible brick heating plant at the east, or rear end.

The Bend Amateur Athletic Club Gymnasium meets National Register criterion "c" as one of the few examples in the state of architecture influenced by the European New Art movement of the turn of the century. The foremost example of this style, rare in Oregon, is Edgar Lazarus's Vista House at Crown Point, a National Register property, which was opened for use on the Columbia River Highway with much fanfare in 1918. The gymnasium also is part of a harmonious local institutional ensemble arrayed along Wall Street, including Reid School, a building constructed of tuff in 1914 which has been listed in the National Register, and the old Bend High School (1925).

The Bend Amateur Athletic Club Gymnasium meets National Register criterion "a" as a phenomenon of boosterism and civic cooperation at a time of dramatic growth for the town, which was platted in 1901 and incorporated as late as 1904. The community developed slowly until it was connected to the Great Northern Railroad system in 1911. There followed at Bend the construction of two large, competing lumber mills: the Shevlin-Hixon Mill, built in 1915, and the Brooks-Scanlon Mill, opened in 1916. In 1915, mill employees and others formed the Bend Athletic Association, forerunner of the Bend Amateur Athletic Club, which was organized in 1917 for the express purpose of building a proper gymnasium. When the Bend Amateur Athletic Club was organized in March 1917, Carl Johnson was its first president. Johnson, cashier for the Shevlin-Hixon Lumber Mill, had been involved previously in Bemidji Athletic Club of Bemidji, Minnesota. The enterprise was paid for entirely through public subscription and donated labor. That the club's 500 members took the responsibility for raising \$50,000 for the construction project is remarkable. It showed that, despite its modest size and recent origin, Bend had the spirit and resources to build a major recreational and social center for the community. When debt for the project was retired in 1919, title to the property was transferred to

## 9. Major Bibliographical References

The Bend Bulletin, March 1917 - March 1925.  
 Bend Amateur Athletic Club Gymnasium Fact Sheet, Bend, Oregon, n.d.  
 W. W. Woodbeck, Directory of Crook, Deschutes, and Jefferson Counties,  
 Vol. 1, 1917; p. 6.

## 10. Geographical Data

Acreeage of nominated property less than one \_\_\_\_\_

Quadrangle name Bend, Oregon

Quadrangle scale 1:24000

UTM References

A 1 0 6 3 4 9 2 0 4 8 7 9 2 6 0  
 Zone Easting Northing

B                                
 Zone Easting Northing

C                              

D                              

E                              

F                              

G                              

H                              

**Verbal boundary description and justification** The Bend Amateur Athletic Club Gymnasium is located in NE  $\frac{1}{4}$  SW  $\frac{1}{4}$ , Sec. 32, T. 17S., R. 12 E., W.M., in Deschutes County, Oregon. IT occupies the southwesterly 100 feet of Block 23 of the Park Addition to the Plat of Bend, Deschutes County, Oregon. The nominated area is 30,000 square feet in size, or 0.689 acres.

List all states and counties for properties overlapping state or county boundaries

state	N/A	code	county	N/A	code
state	N/A	code	county	N/A	code

state	N/A	code	county	N/A	code
-------	-----	------	--------	-----	------

## 11. Form Prepared By

name/title Keith Clark

organization N/A date March 18, 1983

street & number 541 South 14th Street telephone 503/548-2075


city or town Redmond state Oregon 97756

## 12. State Historic Preservation Officer Certification


The evaluated significance of this property within the state is:

national  state  local

As the designated State Historic Preservation Officer for the National Historic Preservation Act of 1966 (Public Law 89-665), I hereby nominate this property for inclusion in the National Register and certify that it has been evaluated according to the criteria and procedures set forth by the National Park Service.

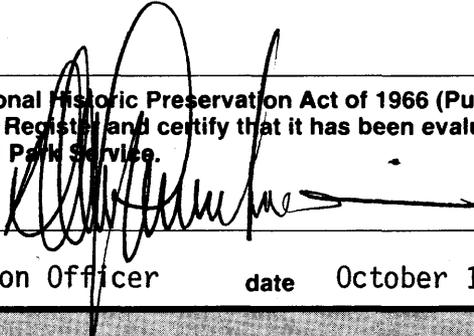State Historic Preservation Officer signature 

title Deputy State Historic Preservation Officer date October 13, 1983

For NPS use only	
I hereby certify that this property is included in the National Register	Entered in the
	National Register
Keeper of the National Register	date <u>11/25/83</u>
Attest:	date
Chief of Registration	

**United States Department of the Interior  
Heritage Conservation and Recreation Service**

**National Register of Historic Places  
Inventory—Nomination Form**

For NCRS use only

received

date entered

Continuation sheet

Item number

8

Page 2

the YMCA. The American Legion subsequently took title in 1921 and held the property until it was taken over by the Bend School District in 1923. The Bend Amateur Athletic Club Gymnasium is locally significant as the setting for a wide range of public uses before it became a high school gymnasium. It was used for athletic contests, concerts and dances; it was an auxiliary hospital during the influenza epidemic of 1918; it served as headquarters for the Boy Scouts, a Chautaugua building and an American Legion Hall.

Construction of the gymnasium, supervised by contractor Guy H. Wilson, was commenced in April 1917 with the acquisition of 300,000 bricks from a local brickyard at a cost of \$10 per thousand.

As early as 1910, the village of Bend was exhibiting an intensity of effort to develop its potential that had no rival in central Oregon. Some of the energy stemmed from the infusion into the community life stream of wealthy, young easterners like William D. Cheney and George Palmer Putman. The rails (1911) and the great sawmills (1916) further increased the communal sense that cooperative effort in "boosting" Bend would benefit everyone. A significant illustration of the strength of this drive is marked from 1917 when the Bend Amateur Athletic Club community center gymnasium project was begun. The funds (finally totaling \$50,000) were raised by public subscription, as opposed to tax money, from many sources, including business men, mill executives and employees. In addition, donations of labor were frequent.

Memberships in the athletic association were open to both men and women. Percy A. Stevens, after whom Bend's first American Legion Post was named, was one of the members. He died when the Tuscania was torpedoed off the Irish coast, February 7, 1918. Before the building was opened to the public, it served Bend as auxiliary hospital during the influenza epidemic of 1918. Forty cots were set up on the main floor. On May 30, 1919, the building was formally open for public use. Athletic contests were held there as were public dances. Billy Sunday spoke there on May 3, 1919, in behalf of the last Victory Loan Drive.

In September, 1919, Bend's Commercial Club endorsed a drive to clear the \$35,000 debt. The first subscription, in the amount of \$250.00 came from the Bend Elks. A total of \$39,000 finally was raised, with the Shevlin-Hixon Mill contributing \$15,590 and Brooks-Scanlon \$13,650. Even architect Lee Thomas donated \$300.00. Bend schools were authorized to use the gymnasium for physical training and basketball practices in 1919. In November, the indebtedness being removed, the building was turned over to the YMCA.

Use of the gymnasium by the YMCA, Percy Stevens American Legion Post, Boy Scouts, the Library Association, Bend Women's Civic Club, Lyceum, Chautaugua, and the general public, indicate a broad community involvement. In June, 1921, the building title went to the American Legion. Then in March, 1923, the building was turned over the Bend School District No. 1, which has retained ownership to the

**United States Department of the Interior  
Heritage Conservation and Recreation Service**

**National Register of Historic Places  
Inventory—Nomination Form**

For NCRS use only

received

date entered

Continuation sheet

Item number

8

Page

3

present day. The acquisition of the gymnasium by the School District in 1923 was a factor which determined selection of the site for construction of the High School, immediate to the north, in 1925.

The architect of both the Bend Amateur Athletic Club Gymnasium and the old High School was Lee Arden Thomas. He was practicing independently at the time of the gymnasium project, whereas by 1925 he was a principal in the firm of Thomas and Mercier. "Thomas was born in Plattsmouth, Nebraska, and was educated in Oregon State College where he received a Bachelor of Science degree in 1907. In 1910 he was graduated from Cornell University with a Bachelor of Architecture degree. He also attended a special course in architecture at Columbia University in New York City. He started practice on the West Coast in the studios of Seattle architects Sommerville and Putman. On moving to Portland, he was associated with A. E. Doyle and subsequently spent three years on the architectural staff of the Portland School District before launching private practice in 1913. When, in 1919, the Oregon Architects Registration Law was enacted, Lee Thomas had the distinction of being named by Governor Ben W. Olcott to the original State Board of Architect Examiners."<sup>1</sup>

The firm of Thomas and Mercier, formed in 1924, is probably best known for its design of the Union Memorial Building on the campus of Oregon State University in Corvallis. Completed in 1928 and of 20th century Classical design, the building was widely acclaimed upon its completion and brought the firm into prominence.

<sup>1</sup> Walton, Elisabeth, "The Oriental Theater," unpublished photo-data report for the Historic American Buildings Survey selection titled "Ten Early 20th Century Theatres: Nickelodeon to Movie Palace, 1910-1931," 1970-2, page 6.

**United States Department of the Interior  
Heritage Conservation and Recreation Service**

**National Register of Historic Places  
Inventory—Nomination Form**

For NCRS use only

received

date entered

Continuation sheet

Item number

9

Page

1

The Bend Bulletin

March 10, 1917, 4:4.	Mar. 15, 1923, 2:3.
March 14, 1917, 1:4.	Aug. 31, 1923, 1:3.
March 16, 1917, 1:2.	Mar. 23, 1925, 4:1-2.
March 17, 1917, 1:2.	Mar. 24, 1925, 4:1-2.
March 19, 1917, 1:2.	Mar. 28, 1925, 4:1-2.
March 21, 1917, 1:2; 4:4-6.	
March 23, 1917, 1:4.	
March 27, 1917, 1:5.	
March 31, 1917, 1:5.	
April 2, 1917, 1:4.	
April 3, 1918, 1:6.	
April 6, 1917, 6:1.	
April 9, 1917, 1:5.	
April 14, 1917, 1:4.	
April 19, 1917, 1:4.	
May 3, 1917, 1:4.	
May 5, 1917, 1:5.	
May 9, 1917, 1:5.	
May 10, 1917, 3:4.	
May 11, 1917, 1:4.	
May 14, 1917, 1:6.	
May 17, 1917, 1:2.	
June 27, 1917, 2:1.	
Aug. 23, 1917, 2:1.	
Sept. 8, 1917, 1:5.	
Oct. 11, 1917, 1:1.	
Nov. 20, 1917, 1:2.	
Nov. 30, 1917, 3:4.	
Feb. 12, 1918, 2:1.	
Feb. 13, 1918, 1:1.	
March 8, 1918, 1:6; 2:3-4.	
April 12, 1918, 2:3.	
April 22, 1918, 1:2.	
April 23, 1918, 1:4; 2:3.	
April 24, 1918, 1:2.	
Sept. 25, 1919, 1:1.	
Oct. 9, 1919, 8:5.	
Oct. 16, 1919, 15:3.	
Oct. 30, 1919, 8:1.	
Nov. 6, 1919, 1:5.	
Nov. 13, 1919, 1:6.	
Nov. 20, 1919, 1:4.	
Dec. 11, 1919, 3:1-2.	
March 10, 1921, 1:4.	
June 23, 1921, 8:2.	
June 30, 1921, 7:5.	

8/9/93

**United States Department of the Interior  
National Park Service**


**National Register of Historic Places  
Continuation Sheet**

Section number \_\_\_\_\_ Page \_\_\_\_\_

---

Bend Amateur Athletic Club      Deschutes County, OREGON

ADDITIONAL DOCUMENTATION APPROVAL



United States Department of the Interior  
National Park Service

AUG 9 1993

National Register of Historic Places  
Registration Form

This form is for use in nominating or requesting determinations for individual properties and districts. See instructions in *How to Complete the National Register of Historic Places Registration Form* (National Register Bulletin 16A). Complete each item by marking "x" in the appropriate box or by entering the information requested. If an item does not apply to the property being documented, enter "N/A" for "not applicable." For functions, architectural classification, materials, and areas of significance, enter only categories and subcategories from the instructions. Place additional entries and narrative items on continuation sheets (NPS Form 10-900a). Use a typewriter, word processor, or computer, to complete all items.

1. Name of Property

historic name Bend Amateur Athletic Club

other names/site number Old Bend High School Gymnasium

2. Location

street & number 520 NW Wall Street (NE corner Wall St. and Idaho Ave.)  Not for publication

city or town Bend  vicinity

state Oregon code OR county Deschutes code 017 zip code 97709

3. State/Federal Agency Certification

As the designated authority under the National Historic Preservation Act, as amended, I hereby certify that this  nomination  request for determination of eligibility meets the documentation standards for registering properties in the National Register of Historic Places and meets the procedural and professional requirements set forth in 36 CFR Part 60. In my opinion, the property  meets  does not meet the National Register criteria. I recommend that this property be considered significant  nationally  statewide  locally. ( See continuation sheet for additional comments.)

James H. Smith 7/23/93  
Signature of certifying official/Title Deputy SHPO Date  
Oregon State Historic Preservation Office  
State of Federal agency and bureau

In my opinion, the property  meets  does not meet the National Register criteria. ( See continuation sheet for additional comments.)

\_\_\_\_\_  
Signature of certifying official/Title Date  
\_\_\_\_\_  
State or Federal agency and bureau

4. National Park Service Certification

I hereby certify that the property is:	Signature of the Keeper	Date of Action
<input type="checkbox"/> entered in the National Register. <input type="checkbox"/> See continuation sheet.	_____	_____
<input type="checkbox"/> determined eligible for the National Register <input type="checkbox"/> See continuation sheet.	_____	_____
<input type="checkbox"/> determined not eligible for the National Register.	_____	_____
<input type="checkbox"/> removed from the National Register.	_____	_____
<input checked="" type="checkbox"/> other, (explain): _____	_____	_____

*Additional Documentation added to the Historic Development of the Bando Company in Bend OR NPS*

Albion Byers 9/23/93

**5. Classification**

**Ownership of Property**  
(Check as many boxes as apply)

- private
- public-local
- public-State
- public-Federal

**Category of Property**  
(Check only one box)

- building(s)
- district
- site
- structure
- object

**Number of Resources within Property**  
(Do not include previously listed resources in the count.)

Contributing	Noncontributing	
1		buildings
		sites
		structures
		objects
1		Total

**Name of related multiple property listing**  
(Enter "N/A" if property is not part of a multiple property listing.)  
Historic Development of The Bend  
Company in Bend, Oregon

**Number of contributing resources previously listed  
in the National Register**  
1

**6. Function or Use**

**Historic Functions**  
(Enter categories from instructions)

Gymnasium/Auditorium

---

---

---

---

---

---

---

---

**Current Functions**  
(Enter categories from instructions)

Vacant/Not In Use

Maintenance office (rear portion)

---

---

---

---

---

---

---

---

**7. Description**

**Architectural Classification**  
(Enter categories from instructions)

Jacobean/Jugendstil

---

---

---

**Materials**  
(Enter categories from instructions)

foundation tuff (volcanic rock)

walls brick

roof asphalt (composition shingles)

other

---

---

---

---

**Narrative Description**

(Describe the historic and current condition of the property on one or more continuation sheets.)

United States Department of the Interior  
National Park Service

AUG 9 1993

National Register of Historic Places  
Continuation SheetSection number 7 Page 1

The Bend Amateur Athletic Club Gymnasium occupies the southwesterly 100 feet of Block 23 of the Park Addition to Bend, the county seat of Deschutes County, Oregon. Completed and opened for use in March, 1918, the three-story building is rectangular in plan, measuring in its main volume 70 x 114 feet. Wall construction is of brick masonry on tuff foundation with concrete mortar. The building is oriented southeasterly to north-easterly, its main entrance fronting Wall Street. It is part of a concentration of civic, or educational buildings arrayed along Wall Street which includes the Reid School of 1914, on the south, old Bend High School (1925) to the north, and the Deschutes County Library across Wall Street to the west. Reid School, constructed of tuff, is presently occupied by the Deschutes County Historical Society. The old Bend High School building is now headquarters of the Bend School District.

The building was designed by Portland architect Lee A. Thomas, who was at the time practicing independently. In its curvilinear gables and English bond brickwork accented by bandings of patterned brick, the gymnasium is Jacobean in style. However, its Indian athlete plaques and austere facade with inset, polygonal central entrance bay are touches of Arts and Crafts architecture influenced by the European New Art movement; examples of which are rare in Oregon. In addition to its stylistic distinction, the building is interesting because of its unusual roof framing system composed of clear-span, bowstring-type timber trusses with steel tension bar reinforcement. The lower chords of the trusses are arched.

The gymnasium rests on a high basement which originally contained a 20 x 60 foot swimming tank, now filled in; a shower and locker room, billiards room, bowling alley and caretaker's quarters. The main story contains the gymnasium-auditorium with its proscenium stage at the east end and two suspended balconies on either side. The partial second story at the west, or entrance end historically contained a lounge-library with chimney pieces of tuff, or native volcanic rock, and the third story, an attic, contained the wrestling room. Interior finish work is straightforward except for the clubroom chimney pieces, just mentioned, and the flat proscenium arch which is trimmed with Indian head bas relief plaques and masques pendant from escutcheons bearing the initials of the Bend Amateur Athletic Club.

The main floor, or gymnasium-auditorium, has a fully-equipped stage and hardwood playing floor. The basic color scheme of the main floor was black and red, initially. The interior has since been repainted. The two suspended balconies provided seating for 350 people each, for a total seating capacity of 1200. On either side of main entrance were offices, ticket booths, with a ladies' restroom in one. On second floor, in the main clubroom with the lava rock fireplaces at each end, there were wood corner window seats. The east end of the clubroom opened toward the main gym and had a balcony for motion picture projection and theatrical flood lights. On either side of the stage, at the opposite end of the building, were reading rooms for mill employees reached from the suspended balconies. On the third floor front, reached by a small spiral staircase, was a wrestling room, heavily padded. In the basement, as has been mentioned, were accommodations for caretaker, a bowling alley, a billiards room, a towel room, showers, 600 lockers, a swimming pool 20 x 60 feet (8' deep to 3'), and seats for 100 spectators.

The roof of the gymnasium, now covered with composition shingles, is a gable roof with its ridge following the direction of the main axis. At either end of the main volume are bold, curved triangular gables with plain coping of cast stone or terra cotta. Lateral gable roof sections run at right angles to the longitudinal gable ridge at east and west ends. Parapet gables of the side elevations are curvilinear in the Jacobean style.

**United States Department of the Interior  
National Park Service**

AUG 9 1993

**National Register of Historic Places  
Continuation Sheet**

Section number 7 Page 2

At the base of the valleys of the intersecting gables are rain spouts of cast stone or terra cotta and ornamental bas relief panels trimmed with a cornice and oak leaf motifs. The major panels contain the crouching figures of Native American athletes at the commencement of a foot race.

The principal, or west facade has a tripartite organization in which a central, two-story, polygonal entrance bay is inset from the main wall plane underneath a concrete bond beam. Main story and second story windows in the outer bays are stacked in elongated inset panels. Typical windows of this facade are multi-paned casement windows. The entrance is approached by a grand staircase composed of stairs at either end turning in dog-leg fashion to a double ramp paralleling the facade. A round-arched portal centered in the base of the staircase gives access to the basement level. Above the random-range tuff foundation, which provides contrast to the brick masonry, is a high base course of patterned brick, the top of which is articulated by several courses of vertically-laid stretcher bricks. The main body of the building is finished in English bond, without embellishment at the corners. The third story, or attic is ventilated by frameless slit windows in the gable ends. Side elevations are generally plain, with fenestration essentially limited to a range of small multi-paned windows at the basement level and industrial-type clerestory windows at the top of the wall, lighting the gymnasium.

At the east end of the building is a straightforward, two-story heating plant wing measuring approximately 48 x 100 feet which was telescoped from the rear wall as a WPA project in 1938-1939. This addition is essentially unarticulated but continues the exterior finish treatment of brick (in this case brick salvaged from the old Central School). A tall, square stack venting the heating plant is located at the juncture of the two volumes. Through a tunnel system, this heating plant was developed to serve not only old Bend High School, which occupies the northerly portion of Block 23 and part of an adjacent block, but the nearby Reid and Thompson Elementary Schools as well.

In 1952 the gymnasium was renovated by the School District, with the result that the basement bowling alley and caretaker's quarters were eliminated. The swimming tank was filled in, presumably at an earlier date. Some internal bracing has been added to the main floor. In all other respects the gymnasium, its distinguishing features and stylistic characteristics, are intact and fully evident. Stairways, wiring, plumbing are in need of upgrading, and the roof requires repair. The building is otherwise sound and a likely candidate for adaptive use rehabilitation.

The building's boiler serves as the heating source for the former Bend High School, which stands partly on the same block, Block 23, and is now occupied as administrative headquarters for the Bend-LaPine School District. In March, 1993, the School District voted to apply \$55,000 toward re-roofing the old Athletic Club building, thus attending to a fundamental requirement for its long-term preservation.

**8. Statement of Significance**

**Applicable National Register Criteria**

(Mark "x" in one or more boxes for the criteria qualifying the property for National Register listing.)

- A** Property is associated with events that have made a significant contribution to the broad patterns of our history.
- B** Property is associated with the lives of persons significant in our past.
- C** Property embodies the distinctive characteristics of a type, period, or method of construction or represents the work of a master, or possesses high artistic values, or represents a significant and distinguishable entity whose components lack individual distinction.
- D** Property has yielded, or is likely to yield, information important in prehistory or history.

**Criteria Considerations**

(Mark "x" in all the boxes that apply.)

Property is:

- A** owned by a religious institution or used for religious purposes.
- B** removed from its original location.
- C** a birthplace or grave.
- D** a cemetery.
- E** a reconstructed building, object, or structure.
- F** a commemorative property.
- G** less than 50 years of age or achieved significance within the past 50 years.

**Narrative Statement of Significance**

(Explain the significance of the property on one or more continuation sheets.)

**9. Major Bibliographical References**

**Bibliography**

(Cite the books, articles, and other sources used in preparing this form on one or more continuation sheets.)

**Previous documentation on file (NPS):**

- preliminary determination of individual listing (36 CFR 67) has been requested
- previously listed in the National Register
- previously determined eligible by the National Register
- designated a National Historic Landmark
- recorded by Historic American Buildings Survey # \_\_\_\_\_
- recorded by Historic American Engineering Record # \_\_\_\_\_

**Areas of Significance**

(Enter categories from instructions)

Architecture

Community Planning and Development

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

**Period of Significance**

1917-1918

\_\_\_\_\_

\_\_\_\_\_

**Significant Dates**

1918

\_\_\_\_\_

\_\_\_\_\_

**Significant Person**

(Complete if Criterion B is marked above)

N/A

**Cultural Affiliation**

N/A

\_\_\_\_\_

\_\_\_\_\_

**Architect/Builder**

Thomas, Lee A., Architect

Wilson, Guy H., Builder

**Primary location of additional data:**

- State Historic Preservation Office
- Other State agency
- Federal agency
- Local government
- University
- Other

Name of repository:

Deschutes Historical Center

Bend Amateur Athletic Club  
Name of Property

Deschutes, Oregon  
County and State

**10. Geographical Data**

**Acreage of Property** 0.69 acres

Bend, Oregon 1:24000

**UTM References**

(Place additional UTM references on a continuation sheet.)

1	10	6349120	4879260
Zone	Easting	Northing	
2			

3			
Zone	Easting	Northing	
4			

See continuation sheet

**Verbal Boundary Description**

(Describe the boundaries of the property on a continuation sheet.)

**Boundary Justification**

(Explain why the boundaries were selected on a continuation sheet.)

**11. Form Prepared By**

name/title Keith Clark/OSHPO; Michael Hall

organization Deschutes County Historical Society date March 1983; August 1992

street & number 129 NW Idaho Avenue telephone (503) 389-1813

city or town Bend state Oregon zip code 97701

**Additional Documentation**

Submit the following items with the completed form:

**Continuation Sheets**

**Maps**

A **USGS map** (7.5 or 15 minute series) indicating the property's location.

A **Sketch map** for historic districts and properties having large acreage or numerous resources.

**Photographs**

Representative **black and white photographs** of the property.

**Additional items**

(Check with the SHPO or FPO for any additional items)

**Property Owner**

(Complete this item at the request of SHPO or FPO.)

name Bend-LaPine School District

street & number 520 NW Wall Street telephone (503) 383-6005

city or town Bend state Oregon zip code 97709

**Paperwork Reduction Act Statement:** This information is being collected for applications to the National Register of Historic Places to nominate properties for listing or determine eligibility for listing, to list properties, and to amend existing listings. Response to this request is required to obtain a benefit in accordance with the National Historic Preservation Act, as amended (16 U.S.C. 470 *et seq.*).

**Estimated Burden Statement:** Public reporting burden for this form is estimated to average 18.1 hours per response including time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding this burden estimate or any aspect of this form to the Chief, Administrative Services Division, National Park Service, P.O. Box 37127, Washington, DC 20013-7127; and the Office of Management and Budget, Paperwork Reductions Projects (1024-0018), Washington, DC 20503.

AUG 9 1993

**United States Department of the Interior  
National Park Service****National Register of Historic Places  
Continuation Sheet**Section number 8 Page 1

The founding of Bend at the opening of the 20th century marked the beginning of industrialization in central Oregon. The setting of the townsite platted by A. M. Drake and others between 1901 and 1904 was a raw and unsettled section at a traditional crossing of the Deschutes River. The location was poised between pine forests on the east slope of the Cascade Range and semi-arid rangeland to the east requiring only irrigation to realize its potential for cultivation. The town was incorporated in 1905. With access to a wheat crop and vast timber tracts as a powerful incentive, subsidiaries of the Great Northern and Union Pacific Railroads pushed rail lines into the region by 1911. Thereafter, Bend rose decisively as the principal manufacturing center and seat of Deschutes County government.

Important to the orderly growth of central Oregon's metropolis was The Bend Company, promoter of infrastructure and industrial and real property development in the new town. The company was headed by Clyde M. McKay and D. E. and A. O. Hunter, who acquired land and made lots available for development considered essential to a well-rounded community. Organized in 1911, the company bought out the interests of its predecessor, The Bend Townsite Company founded by A. M. Drake in 1910. The company supported a policy of benevolent sponsorship of educational and civic projects in the public spirit. Among these was the Bend Amateur Athletic Club, which meets registration requirements set forth in the Historic Development of The Bend Company MPS under Criteria A and C.

The property for The Bend Amateur Athletic Club, facing the westerly corner of Block 23, was donated by The Bend Company to The Bend Holding Corporation, May 11, 1917. D.E. Hunter, who served as The Bend Company's vice-president at the time, was a director of the holding company. The Corporation, formed April 19, 1917, was the financial instrument of The Bend Amateur Athletic Club created to take responsibility for the Club's debt. Although most of the \$50,000 required for construction was raised through subscription, a \$15,000 loan was arranged in September 1917. D. E. Hunter presented the Deed to Carl Johnson, president of the Club and vice-president of the holding company, on May 17, 1917. The club-holding company agreed to place a memorial plate bearing the name of A. O. Hunter, Bend Company director who had died in May of 1917, in one of the main rooms of the building as a condition of the transaction. May 30, 1919, the building was formally opened to the community. The property was subsequently conveyed to School District No. 1 in November 1924 to be used as a gymnasium for the proposed high school to be built on the remaining portion of Block 23.

9 1993

**United States Department of the Interior  
National Park Service****National Register of Historic Places  
Continuation Sheet**Section number 8 Page 2

The Bend Amateur Athletic Club Gymnasium in the Deschutes county seat of Bend, Oregon, is a three-story building of locally-manufactured brick on a foundation of native tuff with concrete mortar. As completed and opened for use in 1918, it measured 70 x 114 feet. Its curvilinear gables and English bond brickwork are distinctive characteristics of the Jacobean style, while its Indian athlete plaques and austere facade with inset, polygonal central entrance bay are touches of Arts and Crafts architecture. The building was designed by Lee A. Thomas, best known as a member of the Portland-based firm of Thomas and Mercier, responsible for the Oriental Theatre in Portland (1927) and the Memorial Union at Oregon State University in Corvallis (1928). Lee Thomas subsequently designed the old Bend High School (1925) which stands to the north of the gymnasium. Planned and carried out by the Bend Amateur Athletic Club to serve multifarious community purposes, the gymnasium contained a basement swimming tank and bowling alley, a main floor gymnasium and auditorium space with suspended balconies, and on a partial second story was the lounge-library which served the dual purpose of clubroom and reading room. The attic story was used as a wrestling room. The building was acquired by the Bend School District in 1924, after which time it served as a school gymnasium. In 1938 and 1939, under auspices of the WPA, the gymnasium was enlarged by a 48 x 100-foot, compatible brick heating plant at the east, or rear end.

The Bend Amateur Athletic Club Gymnasium meets National Register criterion "c" as one of the few examples in the state of architecture influenced by the European New Art movement of the turn of the century. The foremost example of this style, rare in Oregon, is Edgar Lazarus's Vista House at Crown Point, a National Register property, which was opened for use on the Columbia River Highway with much fanfare in 1918. The gymnasium also is part of a harmonious local institutional ensemble arrayed along Wall Street, including Reid School, a building constructed of tuff in 1914 which has been listed in the National Register, and the old Bend High School (1925).

The Bend Amateur Athletic Club Gymnasium meets National Register criterion "a" as a phenomenon of boosterism and civic cooperation at a time of dramatic growth for the town, which was platted in 1901 and incorporated as late as 1904. The community developed slowly until it was connected to the Great Northern Railroad system in 1911. There followed at Bend the construction of two large, competing lumber mills: the Shevlin-Hixon Mill, built in 1915, and the Brooks-Scanlon Mill, opened in 1916. In 1915, mill employees and others formed the Bend Athletic Association, forerunner of the Bend Amateur Athletic Club, which was organized in 1917 for the express purpose of building a proper gymnasium. When the Bend Amateur Athletic Club was organized in March 1917, Carl Johnson was its first president. Johnson, cashier for the Shevlin-Hixon Lumber Mill, had been involved previously in Bemidji Athletic Club of Bemidji, Minnesota. The enterprise was paid for entirely through public subscription and donated labor. That the club's 500 members took the responsibility for raising \$50,000 for the construction project is remarkable. It showed that, despite its modest size and recent origin, Bend had the spirit and resources to build a major recreational and social center for the community. When debt for the project was retired in 1919, title to the property was transferred to

United States Department of the Interior  
National Park Service

AUG 9 1993

National Register of Historic Places  
Continuation Sheet

Section number 8 Page 3

the YMCA. The American Legion subsequently took title in 1921 and held the property until it was taken over by the Bend School District in 1924. The Bend Amateur Athletic Club Gymnasium is locally significant as the setting for a wide range of public uses before it became a high school gymnasium. It was used for athletic contests, concerts and dances; it was an auxiliary hospital during the influenza epidemic of 1918; it served as headquarters for the Boy Scouts, a Chautauqua building and an American Legion Hall.

Construction of the gymnasium, supervised by contractor Guy H. Wilson, was commenced in April 1917 with the acquisition of 300,000 bricks from a local brickyard at a cost of \$10 per thousand.

As early as 1910, the village of Bend was exhibiting an intensity of effort to develop its potential that had no rival in central Oregon. Some of the energy stemmed from the infusion into the community life stream of wealthy, young easterners like William D. Cheney and George Palmer Putman. The rails (1911) and the great sawmills (1916) further increased the communal sense that cooperative effort in "boosting" Bend would benefit everyone. A significant illustration of the strength of this drive is marked from 1917 when the Bend Amateur Athletic Club community center gymnasium project was begun. The funds (finally totaling \$50,000) were raised by public subscription, as opposed to tax money, from many sources, including business men, mill executives and employees. In addition, donations of labor were frequent.

Memberships in the athletic association were open to both men and women. Percy A. Stevens, after whom Bend's first American Legion Post was named, was one of the members. He died when the Tuscania was torpedoed off the Irish coast, February 7, 1918. Before the building was opened to the public, it served Bend as auxiliary hospital during the influenza epidemic of 1918. Forty cots were set up on the main floor. On May 30, 1919, the building was formally open for public use. Athletic contests were held there as were public dances. Billy Sunday spoke there on May 3, 1919, in behalf of the last Victory Loan Drive.

In September, 1919, Bend's Commercial Club endorsed a drive to clear the \$35,000 debt. The first subscription, in the amount of \$250.00 came from the Bend Elks. A total of \$39,000 finally was raised, with the Shevlin-Hixon Mill contributing \$15,590 and Brooks-Scanlon \$13,650. Even architect Lee Thomas donated \$300.00. Bend schools were authorized to use the gymnasium for physical training and basketball practices in 1919. In November, the indebtedness being removed, the building was turned over to the YMCA.

Use of the gymnasium by the YMCA, Percy Stevens American Legion Post, Boy Scouts, the Library Association, Bend Women's Civic Club, Lyceum, Chautauqua, and the general public, indicate a broad community involvement. In June, 1921, the building title went to the American Legion. Then, November 1924, the building was turned over the Bend School District No. 1, which has retained ownership to the

**United States Department of the Interior  
National Park Service**

AUG 9 1993

**National Register of Historic Places  
Continuation Sheet**

Section number 8 Page 4

present day. The acquisition of the gymnasium by the School District was a factor which determined selection of the site for construction of the High School, immediately to the north, in 1925.

The architect of both the Bend Amateur Athletic Club Gymnasium and the old High School was Lee Arden Thomas. He was practicing independently at the time of the gymnasium project, whereas by 1925 he was a principal in the firm of Thomas and Mercier. "Thomas was born in Plattsmouth, Nebraska, and was educated in Oregon State College where he received a Bachelor of Science degree in 1907. In 1910 he was graduated from Cornell University with a Bachelor of Architecture degree. He also attended a special course in architecture at Columbia University in New York City. He started practice on the West Coast in the studios of Seattle architects Sommerville and Putman. On moving to Portland, he was associated with A. E. Doyle and subsequently spent three years on the architectural staff of the Portland School District before launching private practice in 1913. When, in 1919, the Oregon Architects Registration Law was enacted, Lee Thomas had the distinction of being named by Governor Ben W. Olcott to the original State Board of Architect Examiners."<sup>1</sup>

The firm of Thomas and Mercier, formed in 1924, is probably best known for its design of the Union Memorial Building on the campus of Oregon State University in Corvallis. Completed in 1928 and of 20th century Classical design, the building was widely acclaimed upon its completion and brought the firm into prominence.

<sup>1</sup> Walton, Elisabeth, "The Oriental Theater," unpublished photo-data report for the Historic American Buildings Survey selection titled "Ten Early 20th Century Theatres: Nickelodeon to Movie Palace, 1910-1931," 1970-2, page 6.

United States Department of the Interior  
National Park Service

AUG 9 1993

National Register of Historic Places  
Continuation Sheet

Section number 9 Page 1

BIBLIOGRAPHY -- BEND AMATEUR ATHLETIC CLUB

The Bend Bulletin:

March 10, 1917, 4:4.  
 March 14, 1917, 1:4.  
 March 16, 1917, 1:2.  
 March 17, 1917, 1:2.  
 March 19, 1917, 1:2.  
 March 21, 1917, 1:2; 4:4-6.  
 March 23, 1917, 1:4.  
 March 27, 1917, 1:5.  
 March 31, 1917, 1:5.  
 April 2, 1917, 1:4.  
 April 3, 1917, 1:6.  
 April 6, 1917, 6:1.  
 April 9, 1917, 1:5.  
 April 14, 1917, 1:4.  
 April 19, 1917, 1:4.  
 May 3, 1917, 1:4.  
 May 5, 1917, 1:5.  
 May 9, 1917, 1:5.  
 May 10, 1917, 3:4.  
 May 11, 1917, 1:4.  
 May 14, 1917, 1:6.  
 May 17, 1917, 1:2.  
 June 27, 1917, 2:1.  
 Aug. 23, 1917, 2:1.  
 Sept. 8, 1917, 1:5.  
 Oct. 11, 1917, 1:1.  
 Nov. 20, 1917, 1:2.  
 Nov. 30, 1917, 3:4.  
 Feb. 12, 1918, 2:1.  
 Feb. 13, 1918, 1:1.  
 March 8, 1918, 1:6; 2:3-4.  
 April 12, 1918, 2:3.  
 April 22, 1918, 1:2.  
 April 23, 1918, 1:4; 2:3.  
 April 24, 1918, 1:2.  
 Sept. 25, 1919, 1:1.  
 Oct. 9, 1919, 8:5.  
 Oct. 16, 1919, 15:3.  
 Oct. 30, 1919, 8:1.  
 Nov. 6, 1919, 1:5.  
 Nov. 13, 1919, 1:6.  
 Nov. 20, 1919, 1:4.  
 Dec. 11, 1919, 3:1-2.  
 March 10, 1921, 1:4.  
 June 23, 1921, 8:2.

June 30, 1921, 7:5.  
 Mar. 15, 1923, 2:3.  
 Aug. 31, 1923, 1:3.  
 Mar. 23, 1925, 4:1-2.  
 Mar. 24, 1925, 4:1-2.  
 Mar. 28, 1925, 4:1-2.

Clark, Keith, National Register Nomination  
 Form on Bend Amateur Athletic Club Gymnasium,  
 Bend, Deschutes County, Oregon, March 18, 1983.

Bend Amateur Athletic Club Gymnasium Fact Sheet,  
 undated, Bend, Oregon.

Woodbeck, W. W., Directory of Crook, Deschutes  
 and Jefferson Counties, Vol. 1, 1917, page 6.

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Continuation Sheet**

Section number 10 Page 1

Verbal Boundary Description

The nominated area is located in NE $\frac{1}{2}$  SW $\frac{1}{2}$  Sec. 32, T.17S., R.12E., Willamette Meridian, in Bend, Deschutes County, Oregon. A portion of Tax Lot 8600 at said location, it is described as the south 100 feet of Block 23 of the Park Addition to the Plat of Bend.

Boundary Justification

The nominated area of 30,000 square feet, or 0.69 acres, is that site which has been occupied by the Bend Amateur Athletic Club Gymnasium from 1918 onward. It encompasses the building footprint and enough ground on all sides to include the immediate setting.


# PARK ADDITION

TO BEND


OREGON.

GOULD & WARD  
CIVIL ENGINEERS.

AUG 9 1933

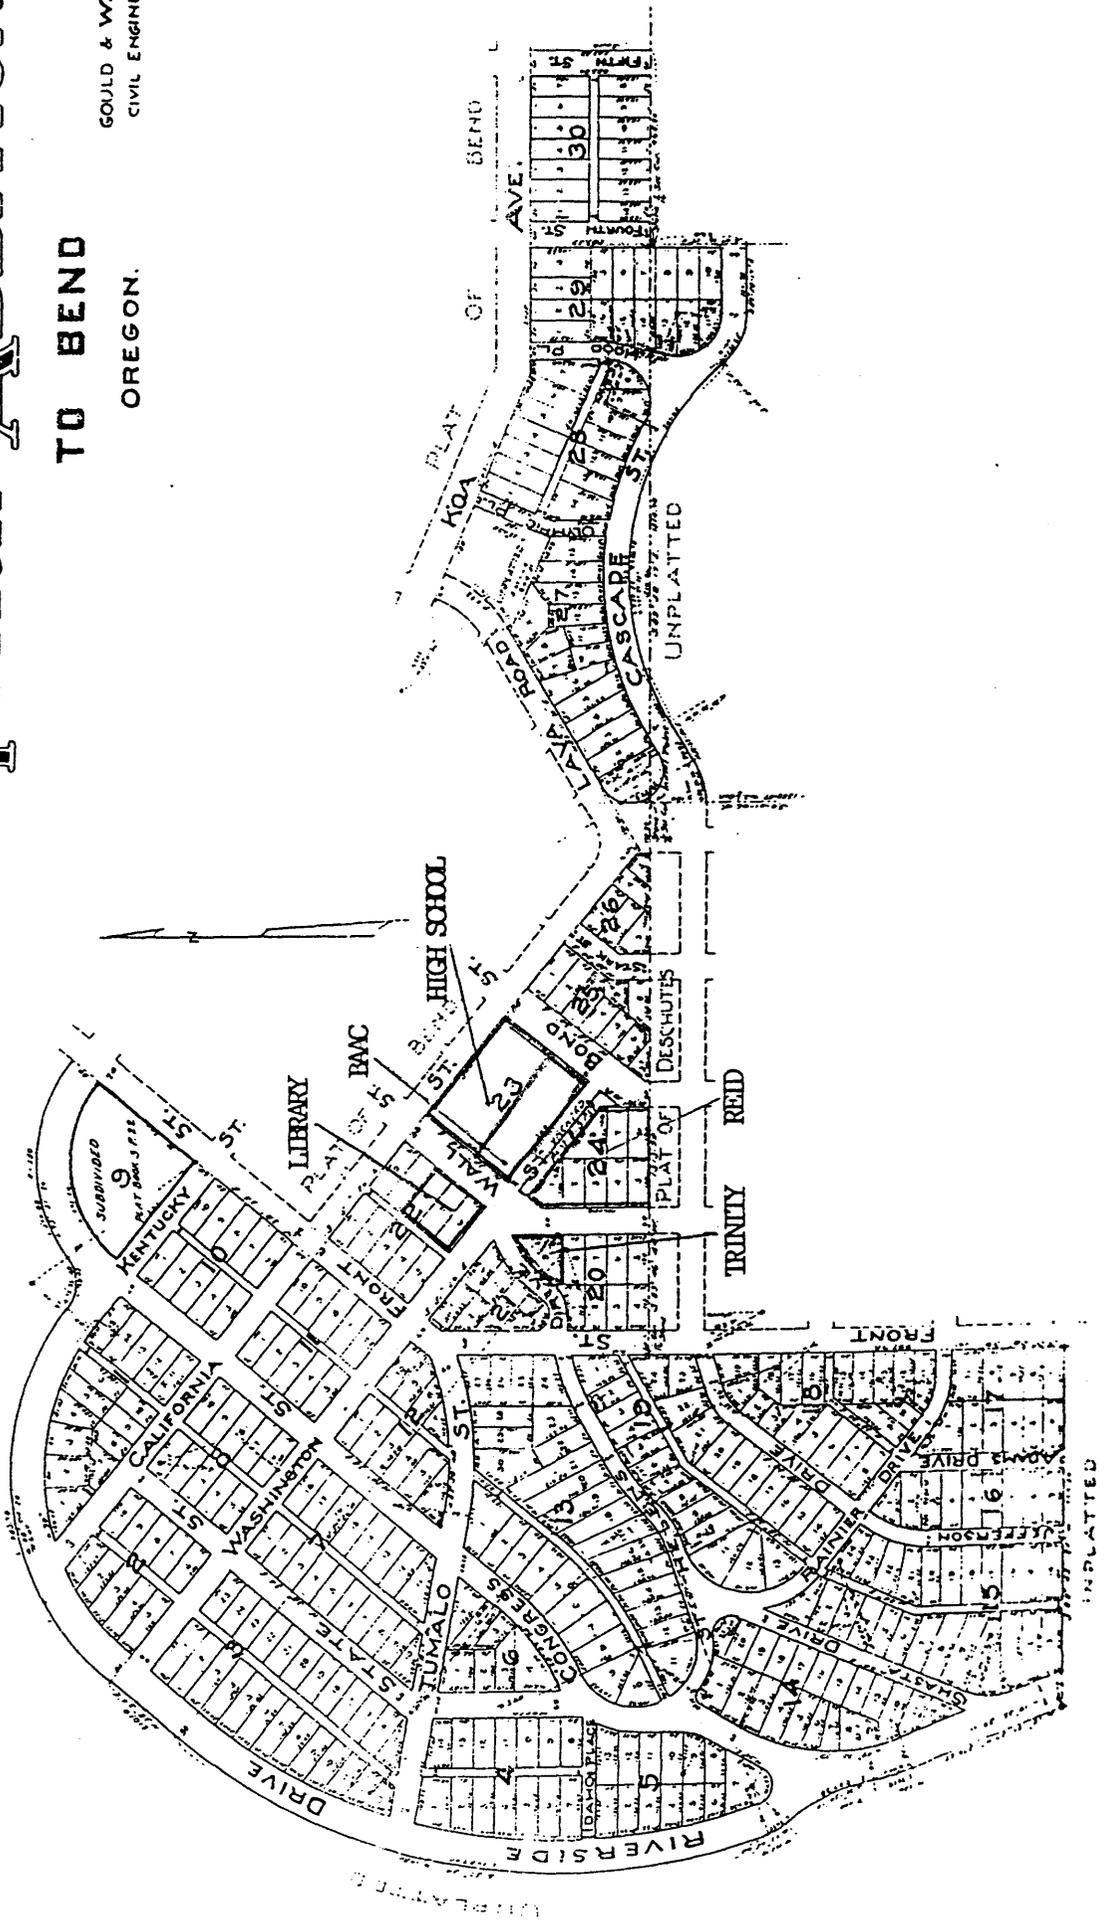

AUG 9 1933

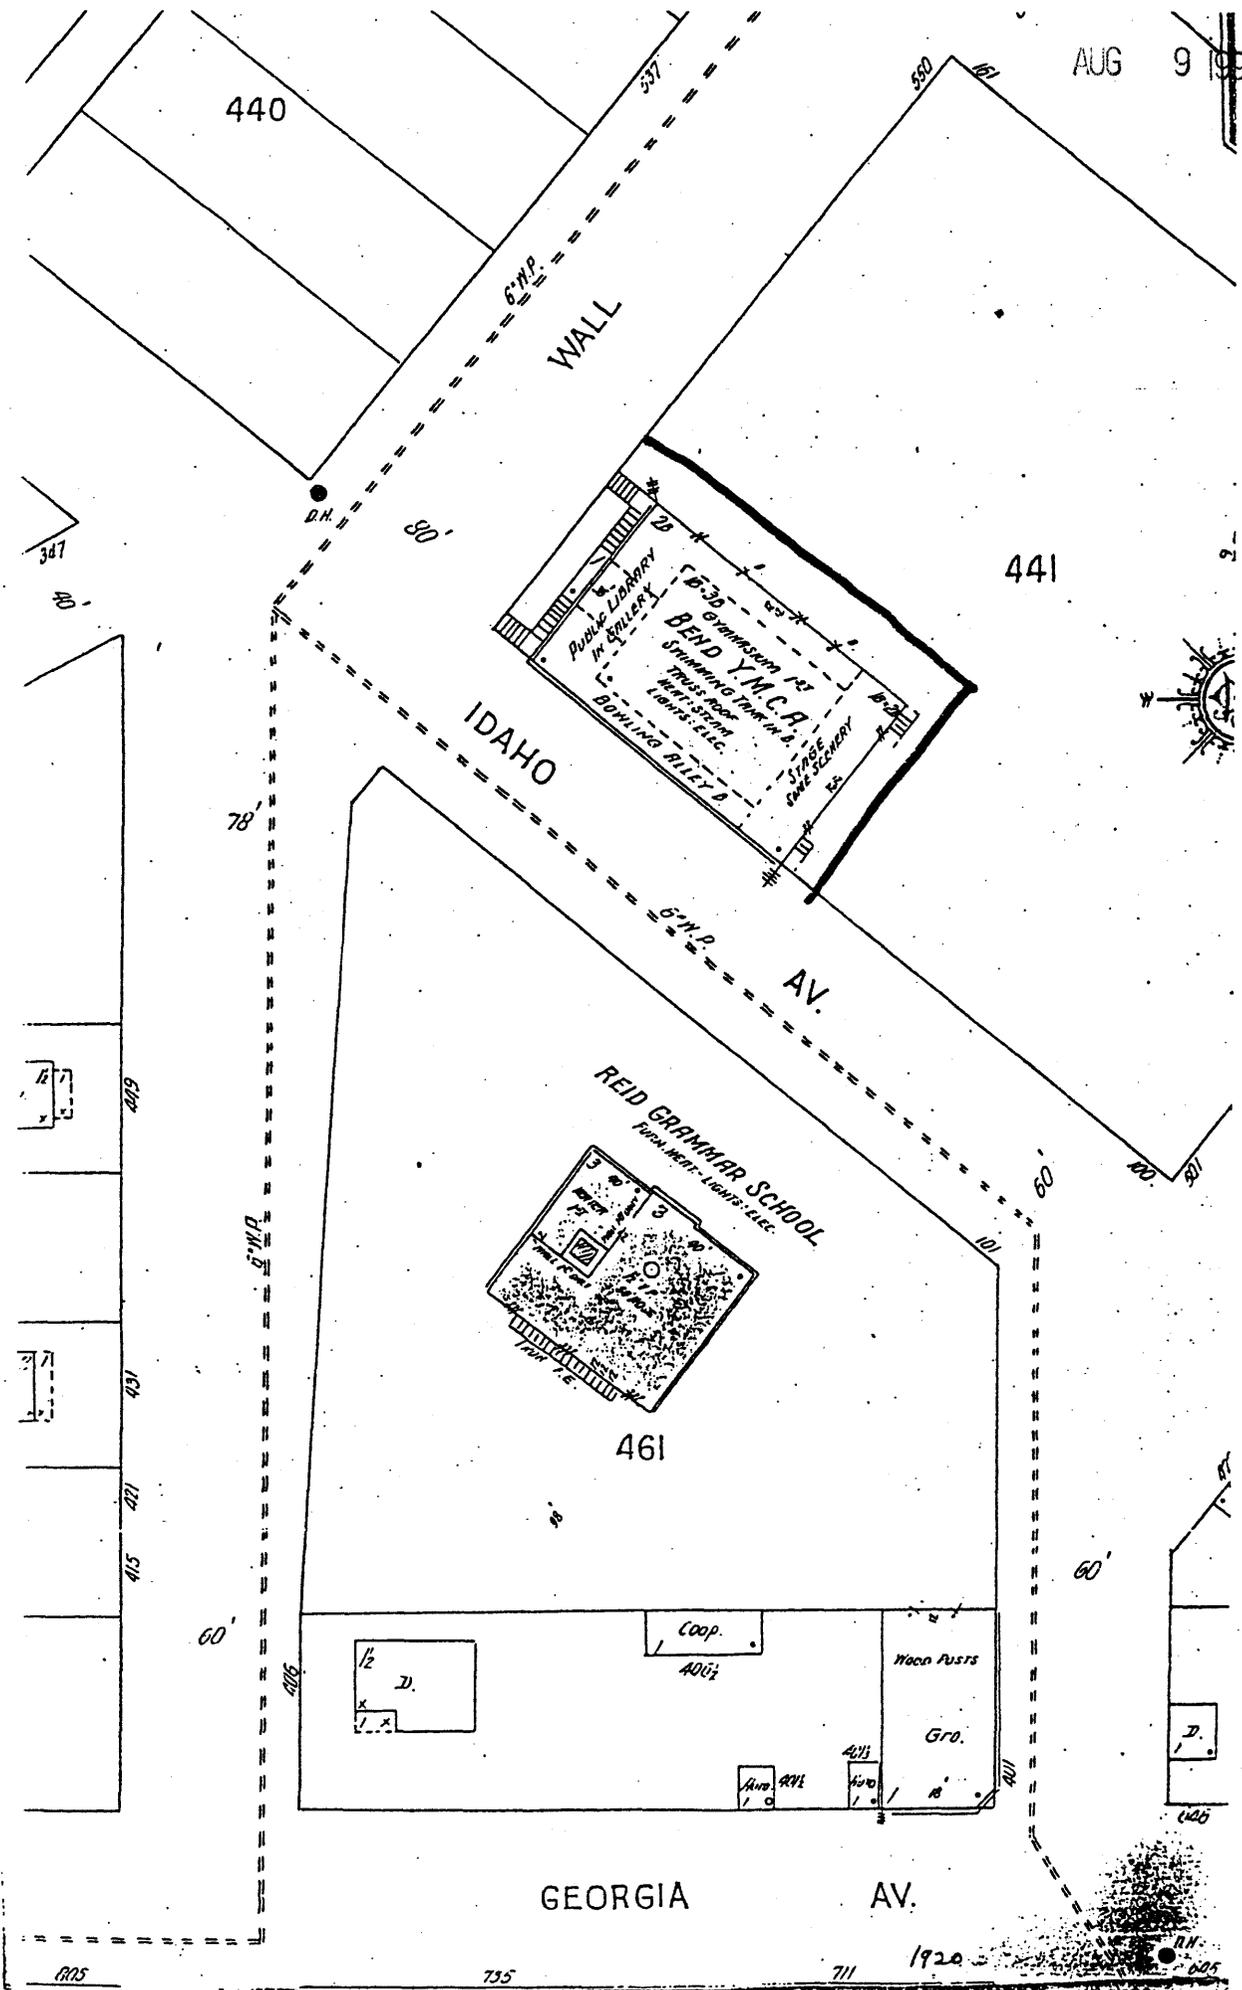

440

441

461

GEORGIA AV.

625

735

711

1920

425

347

80'

78'

80'

550

101

537

6" W.P.

WALL

IDAHO AV.

AV.

REID GRAMMAR SCHOOL  
Public Library, Lounge, Etc.

Coop.  
400 1/2


Waco Posts  
Gro.

1/2 D.  
1.2


400 1/2

400 1/2

D.  
1.2



AUG 9 1998

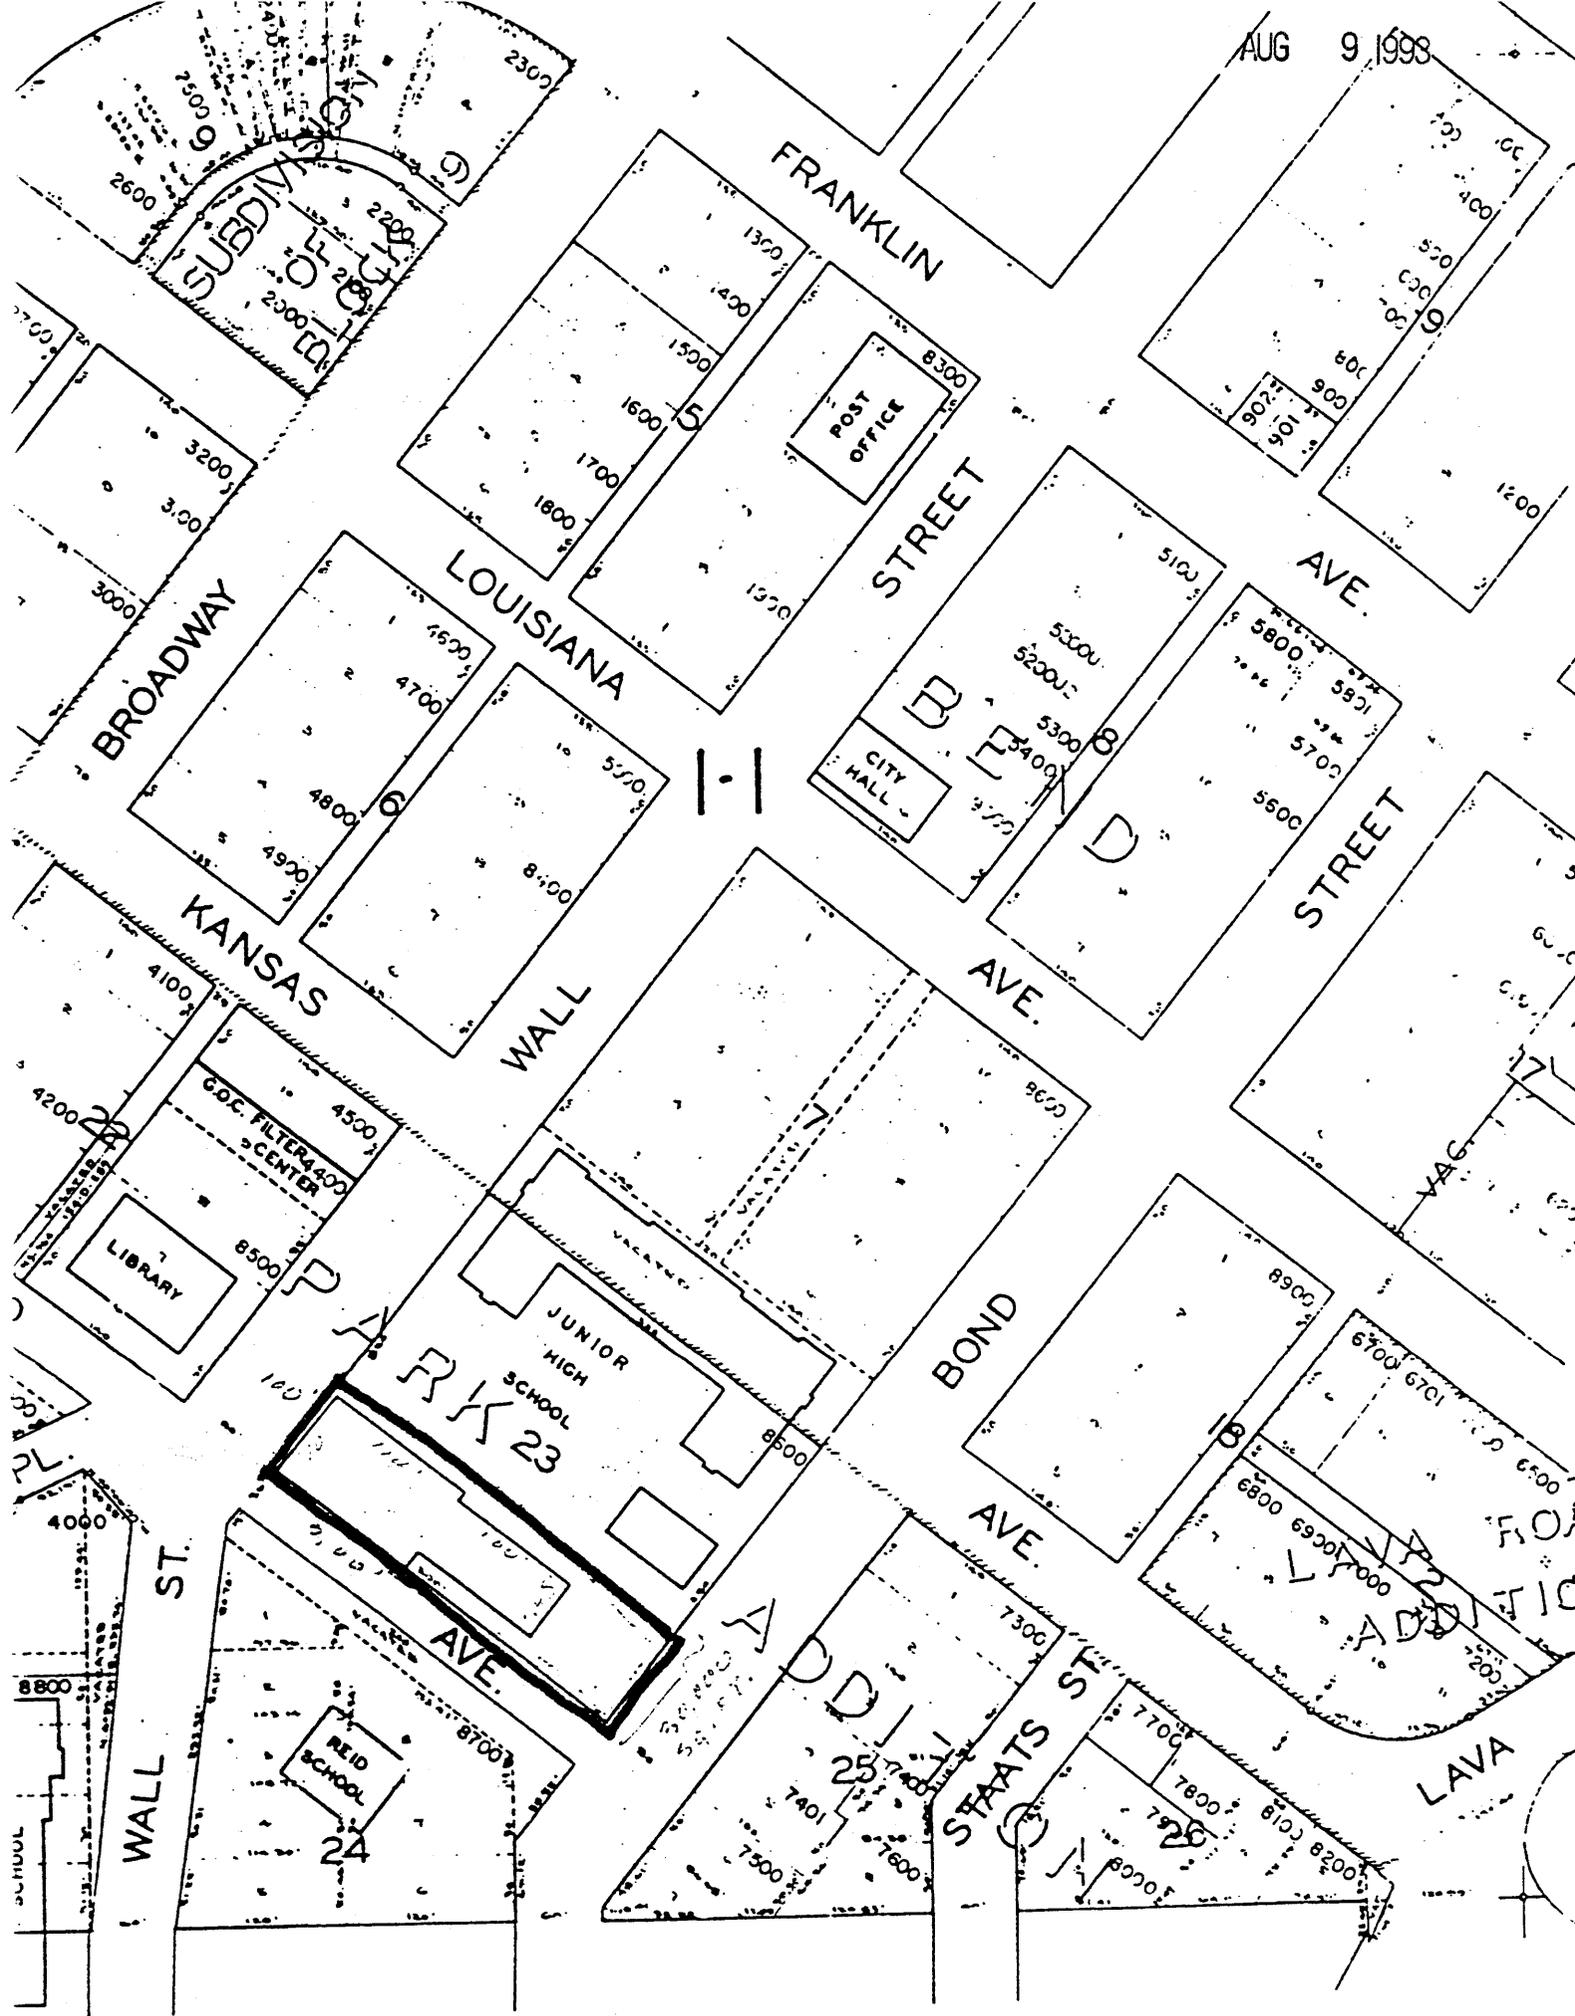



Wash. Hotel, Bend, Ore.

Bend Amateur Athletic Club

Historic View, c. 1920

1 of 15

West facing entrance

HISTORIC DEVELOPMENT OF THE BEND COMPANY MRS  
BEND, TASCHEWITS COMPANY, BRILLON

MICHAEL HALL COPY NEGATIVE  
TASCHEWITS HISTORICAL COMPANY  
BEND, OR 97-101



2 OF 5

# Band Amateur Athletic Club

MICHAEL WALL PHOTO 1992  
DASCHEWITS HISTORICAL COMPANY  
BAND, DASCHEWITS COUNTY, OREGON

Front Entrance / West  
ELEVATION

HISTORIC DEVELOPMENT OF THE BAND COMPANY MPS  
BAND, DASCHEWITS COUNTY, OREGON



3075

# Bend Amateur Athletic Club

1992

## South Elevation

HISTORIC DEVELOPMENT OF THE BAND COMPANY, MPS  
BAND, DESCHUTES COUNTY, OREGON

MICHAEL HALL PHOTO

DESCHUTES HISTORICAL CENTER

BAND, OR. 97701



#075

Bend Amateur Athletic Club 1992

North.

HISTORIC DEVELOPMENT OF THE BAND COMPANY MPS  
BAND, DESCHUTES COUNTY, OREGON

MICHAEL HALL: PHOTO

DESCHUTES HISTORICAL CENTER -  
BAND, DESCHUTES COUNTY, OREGON 97701



5074

HISTORICAL DEVELOPMENT OF THE BEND ORANGEWOODS  
BAND, DESCHUTES COUNTY, OREGON

# Bend Amateur Athletic Club

MADALLION, SOUTH PLACATION

MICHAEL WALL PILOT'S  
DESCHUTES HISTORICAL  
CLUB  
BAND, OR. 97701

1992



Bend Amateur Athletic Club  
Gymnasium, NE Corner Wall and  
Idaho, Bend (Deschutes Co.),  
OR 97701. Front entrance,  
west side.

*1 OF 16*

*1983 PHOTO BY*

Keith Clark, 541 S. 14th,  
Redmond, OR 97756



SPEED  
20

571

Bend Amateur Athletic Club  
Gymnasium, NE Corner Wall and  
Idaho, Bend (Deschutes Co.),  
OR 97701. Front entrance,  
view from SW.

2 OF 16

1983 PHOTO BY

Keith Clark, 541 S. 14th,  
Redmond, OR 97756



Bend Amateur Athletic Club  
Gymnasium, NE Corner Wall and  
Idaho, Bend (Deschutes Co.),  
OR 97701. Detail of decora-  
tive cornice.

3 OF 16

1983 PHOTO BY  
Keith Clark, 541 S. 14th,  
Redmond, OR 97756



Bend Amateur Athletic Club  
Gymnasium, NE Corner Wall and  
Idaho, Bend (Deschutes Co.),  
OR 97701. South side.

*1983 PHOTO BY*  
Keith Clark, 541 S. 14th,  
Redmond, OR 97756

*4 OF 14*



Bend Amateur Athletic Club  
Gymnasium, NE Corner Wall and  
Idaho, Bend (Deschutes Co.),  
OR 97701. South side.

*1983 PHOTO BY*  
Keith Clark, 541 S. 14th,  
Redmond, OR 97756

*5 OF 16*



Bend Amateur Athletic Club  
Gymnasium, NE Corner Wall and  
Idaho, Bend (Deschutes Co.),  
OR 97701. Alteration -- addi-  
tion of heating plant, east  
side.

*1983 PHOTO BY*

Keith Clark, 541 S. 14th,  
Redmond, OR 97756


*6 OF 14*



Bend Amateur Athletic Club  
Gymnasium, NE Corner Wall and  
Idaho, Bend (Deschutes Co.),  
OR 97701. Truss detail.

*1983 PHOTO BY*  
Keith Clark, 541 S. 14th,  
Redmond, OR 97756

*7 OF 14*

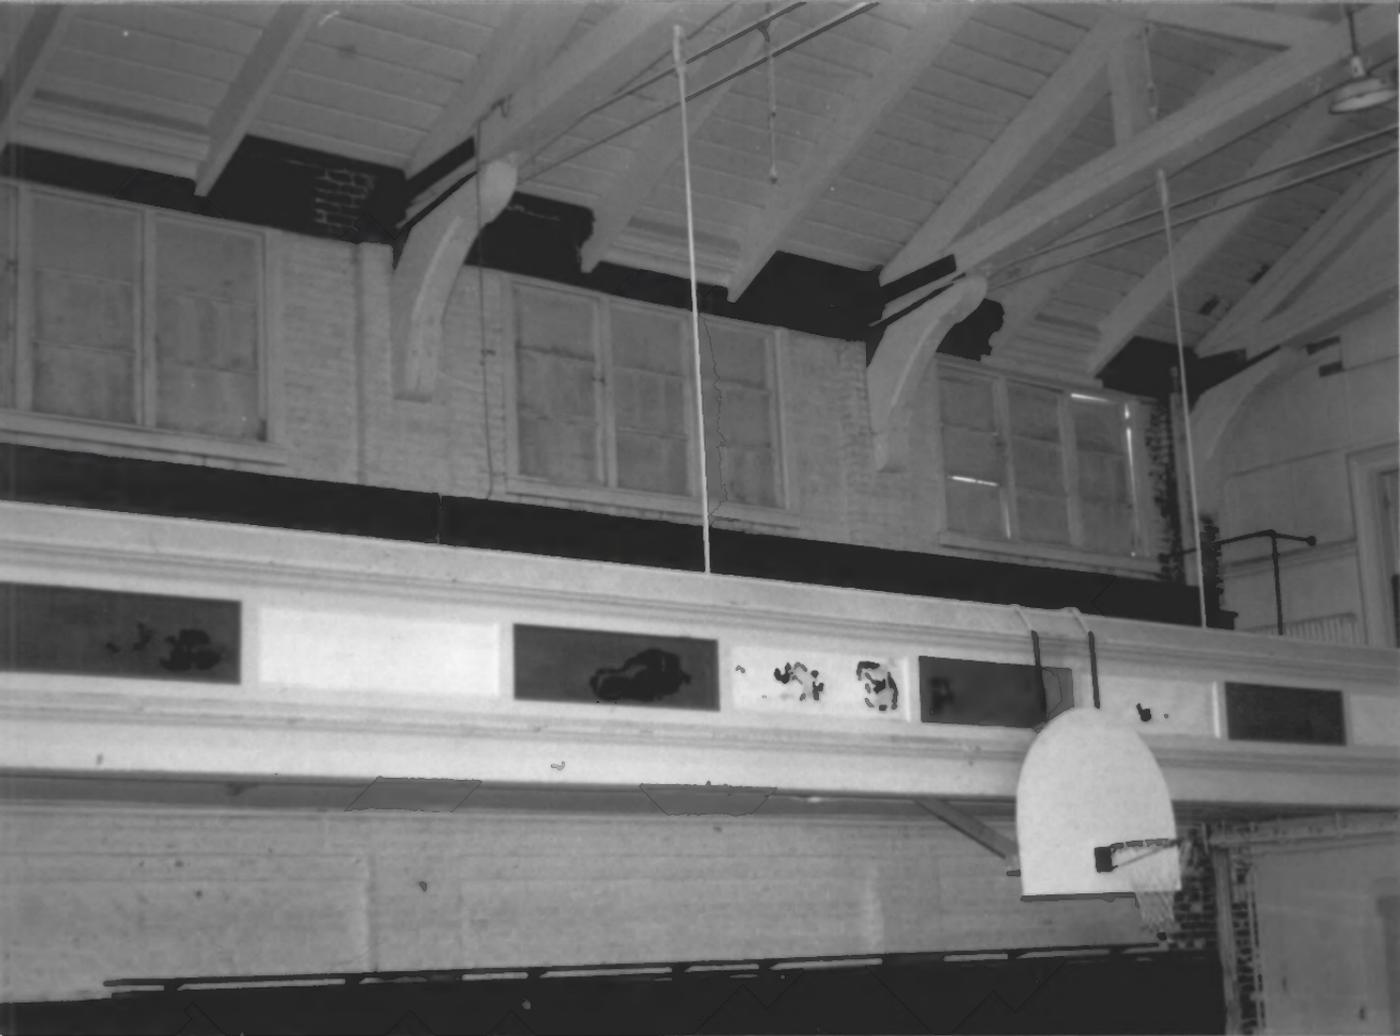

Bend Amateur Athletic Club  
Gymnasium, NE Corner Wall and  
Idaho, Bend (Deschutes Co.),  
OR 97701. Suspended north  
balcony.

1983 PHOTO BY  
Keith Clark, 541 S. 14th  
Redmond, OR 97756.

8 OF 16



Bend Amateur Athletic Club  
Gymnasium, NE Corner Wall and  
Idaho, Bend (Deschutes Co.),  
OR 97701. Interior deteriora-  
tion.

1983 PHOTO BY  
Keith Clark, 541 S. 14th,  
Redmond, OR 97756

9 OF 16



Bend Amateur Athletic Club  
Gymnasium, NE Corner Wall and  
Idaho, Bend (Deschutes Co.),  
OR 97701. Suspended south  
balcony.

*1983 PHOTO BY*  
Keith Clark, 541 S. 14th,  
Redmond, OR 97756

*10 OF 16*



Bend Amateur Athletic Club  
Gymnasium, NE Corner Wall and  
Idaho, Bend (Deschutes Co.),  
Oregon 97701. Stage front.

*1983 PHOTO BY*  
Keith Clark, 541 S. 14th,  
Redmond, OR 97756

*11 OF 16*



Bend Amateur Athletic Club  
Gymnasium, NE Corner Wall and  
Idaho, Bend (Deschutes Co.),  
Ore. 97701. Decorative  
plaques, proscenium.

1983 PHOTO BY 12 OF 16  
Keith Clark, 541 S. 14th,  
Redmond, OR 97756



Bend Amateur Athletic Club  
Gymnasium, NE Corner Wall and  
Idaho, Bend (Deschutes Co.),  
Ore. 97701. Emblem, right  
proscenium.

13 OF 16

1983 PHOTO BY

Keith Clark, 541 S. 14th,  
Redmond, OR 97756



Bend Amateur Athletic Club  
Gymnasium, NE Corner Wall and  
Idaho, Bend, Ore. (Deschutes  
Co.) 97701. Stairway to south  
balcony, 1983. 1983 PHOTO BY  
Keith Clark, 541 S. 14th,  
Redmond, OR 97756.

14 OF 16



Bend Amateur Athletic Club  
Gymnasium, NE Corner Wall and  
Idaho, Bend (Deschutes Co.),  
OR. 97701. Lounge, north  
fireplace. 1983 PHOTO BY  
Keith Clark, 541 S. 14th,  
Redmond, OR 97756

15 OF 16



Bend Amateur Athletic Club  
Gymnasium, NE Corner Wall and  
Idaho, Bend (Deschutes Co.),  
OR 97701. Basement, swimming  
pool, covered.

*16 OF 16*

*1983 PHOTO BY*

Keith Clark, 541 S. 14th,  
Redmond, OR 97756